


# DRYWALL LAY-IN TILE

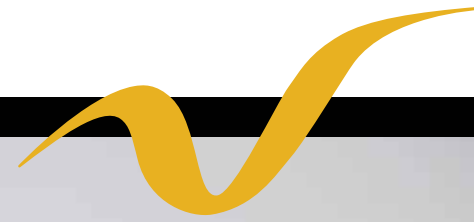

## USED IN

- Restrooms and utility areas
- Locker Rooms
- Kitchens and Food Preparation areas
- Parkades

## SUBSTRATES

- Certainteed Gypsum
- Certainteed M2Tech

SMOOTH WHITE DRYWALL LAY IN TILE


## FEATURES AND BENEFITS













- Gypsum core with vinyl facing
- Durable
- Sag Resistant
- High Light Reflectance
- Cleanable tile surface

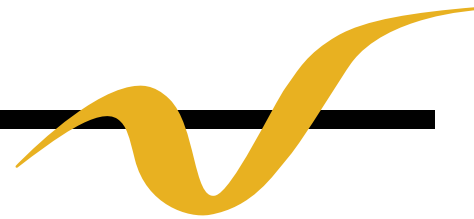SMOOTH WHITE

TEXTURED WHITE

Additional Vinyl colours are available. Please contact your representative or visit [www.vipco.ca](http://www.vipco.ca) to see details and images.



PRODUCT	EDGE	PANEL SIZE	FLAME SPREAD	SMOKE DEVELOPED INDEX	COLOUR	PALLET SIZE	WEIGHT
1/2" Std Smooth White Lay in Tile	SQ 	2' x 2' x 1/2"	Class A	35	White	104	1.60 lb/sq ft
	SQ 	2' x 4' x 1/2"	Class A	35	White	100	1.60 lb/sq ft
1/2" Type C Smooth White Lay in Tile	SQ 	2' x 2' x 1/2"	Class A	15	White	104	1.91 lb/sq ft
	SQ 	2' x 4' x 1/2"	Class A	15	White	100	1.91 lb/sq ft
5/8" Type X Smooth White Lay in Tile	SQ 	2' x 2' x 1/2"	Class A	10	White	104	2.28 lb/sq ft
	SQ 	2' x 4' x 1/2"	Class A	10	White	100	2.28 lb/sq ft
1/2" Std Texture White Lay in Tile	SQ 	2' x 2' x 1/2"	Class A	35	White	104	1.60 lb/sq ft
	SQ 	2' x 4' x 1/2"	Class A	35	White	100	1.60 lb/sq ft
1/2" Std Type C Texture White Lay in Tile	SQ 	2' x 2' x 1/2"	Class A	15	White	104	1.91 lb/sq ft
	SQ 	2' x 4' x 1/2"	Class A	15	White	100	1.91 lb/sq ft
5/8" Type X Texture White Lay in Tile	SQ 	2' x 2' x 1/2"	Class A	10	White	104	2.28 lb/sq ft
	SQ 	2' x 4' x 1/2"	Class A	10	White	100	2.28 lb/sq ft

Please note tile is available in custom sizes. Please contact your representative or customer service for a quote.

### PRODUCT STANDARDS

#### CERTAINTEEED GYPSUM

CAN / CSA - A82.27 Gypsum Board

ASTM C 1936 Gypsum Board

ASTM C 36 Gypsum Wallboard

### SUGGESTED CLEANING AND MAINTENANCE INSTRUCTIONS

Gently wipe using a clean sponge, warm water and mild soap (such as Ivory Liquid Detergent) Wipe off excess water, with a clean, soft cloth. Do not use abrasive cleaners or cleaners containing chlorine bleach or solvents.

### TEST RESULTS

Flamespread Index	15
Smoke Developed Index	20

#### CALIBRATION DATA

Time to Ignition of Last Red Oak (sec)	46.0
Red Oak Smoke Area (%A*min)	107.6

### VISIT US ONLINE



SCAN TO VISIT VIPCO.CA

All fire testing done in accordance to CAN/ULC S102.1 - Testing performed by Intertek

